

STYLE F4 SHOCKMOUNT RACK

Shockmount Method:

Rack rails permanently attached to inner rack shell that is embedded in a 2" foam lined outer case. Foam blocking beneath this inner rack shell is of a high density polyethylene to provide added support and cushioning when rack is operational in upright position. Rack lids have high density polyethylene foam blocking to cushion any transit movement of inner rack shell. F4 style shockmount racks are available in Quick Ship stock sizes; 16RU or 24RU x 24" rackable depth and 20RU or 26RU x 30" rackable depth. All custom sizes also available.



Rack Shown -Stock Model
Quick Ship OEMRACF4X26X30

Specifications:

- Top Grade 1/4", 3/8" or 1/2" plywood case construction with mar resistant plastic outer laminate - ATA (Air Transport Assoc.) spec. 300, category 1 compliant.
- Double wall heavy-duty aluminum angle extrusions throughout.
- Positive mating aluminum tongue & groove valance closure.
- Removable front & rear lids that conveniently mate for storage or use as additional case (3" deep front and 4" deep rear lids.)
- Removable, fully finished, inner rack shell - choice of rackable heights (varying in 1RU increments).
- Choice of rackable rail-to-rail depths (rack rails recessed 5/8" front & rear).
- Choice of 10-32 tapped or 3/8" square hole rack rails (front and/or rear).
- Step-down, steel knuckeld ball corners.
- Multiple recessed, spring-loaded, hasp-locking, heavy-duty twist catches.
- Multiple spring-loaded, recessed, rubber- gripped handles.
- Standard outer laminate color for stock sizes - black - custom sizes available in red, white, blue, hunter green, yellow, orange, light or dark gray, black or Bordeaux.

STYLE F8 SHOCKMOUNT RACK

Shockmount Method:


Rack rails permanently attached to outer case by use of cup-mount shock isolating elastomeric isolators that help defend against hi-impact shocks and vibration. Each shock isolator has a maximum stationary load rating of 40 lbs. The number of shock isolators used will be calculated based on the total payload of your rack. F8 style shockmount racks are available strictly on a CUSTOM basis.



Rack Shown -
Custom Model F8X26X30


Specifications:

- Top Grade 1/4", 3/8" or 1/2" plywood case construction with mar resistant fiberglass outer laminate - ATA (Air Transport Assoc.) spec. 300, category 1 compliant.
- Double wall heavy-duty aluminum angle extrusions throughout.
- Positive mating aluminum tongue & groove valance closure.
- Removable front & rear lids that conveniently mate for storage or use as additional case (3" deep front and 4" deep rear lids.)
- Choice of rackable heights (varying in 1 RU increments).
- Choice of rackable rail-to-rail depths (rack rails recessed 1-1/16" front & rear).
- Choice of 10-32 tapped or 3/8" square hole rack rails (front and/or rear).
- Step-down, steel knuckeld ball corners.
- Multiple recessed, spring-loaded, hasp-locking, heavy-duty twist catches.
- Multiple spring-loaded, recessed, rubber- gripped handles.
- Custom sizes available in red, white, blue, hunter green, yellow, orange, light or dark gray, black or Bordeaux.

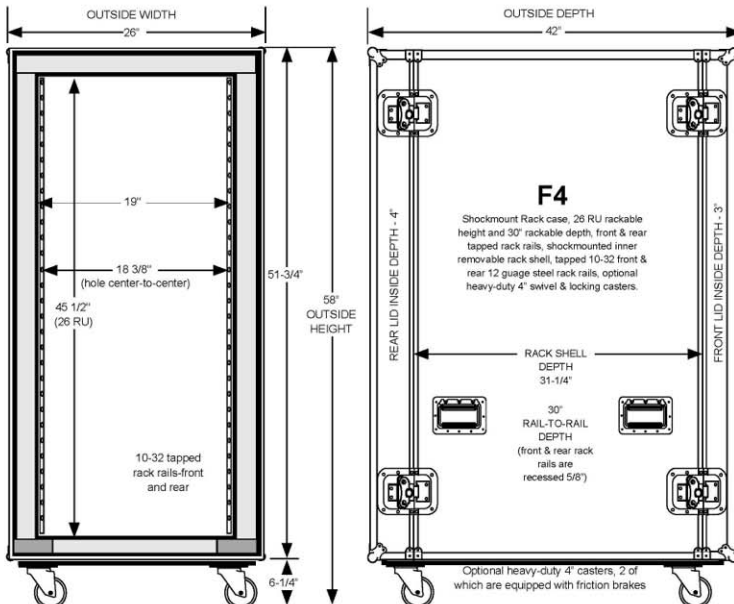

Rack Shown -Stock Model Quick Ship OEMRACF4X26X30

- POPULAR OPTIONS**
- Table legs incorporated into front and/or rear lids (size permitting).
 - Heavy duty swivel and/or locking casters.
 - Removable caster plates.
 - Vinyl Logo and/or Stencils
 - Key or Combination Locks
 - Rack Drawers
 - Rack Shelves
 - Rack Filler Panels
 - Rack Keyboard Trays
 - Rack Support System
 - Rack Fasteners, etc.

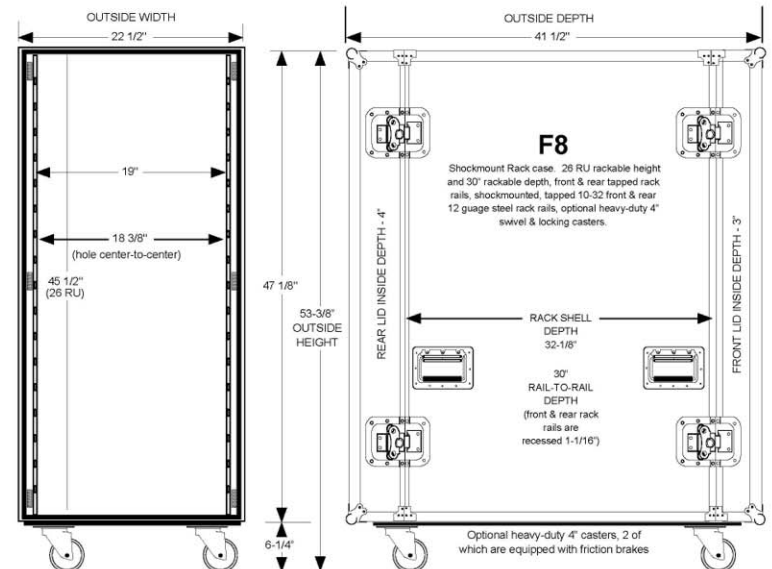

Rack Shown - Custom Model F8X26X30